


Supply voltage	12 V DC
Weight	0.1 kg
Operation temperature	-40...+50 °C
Ingress protection	IP65, IK08

	Wavelenght
IR-Plate-2-850	850 nm
IR-Plate-3-850	
IR-Plate-2-940	940 nm
IR-Plate-3-940	

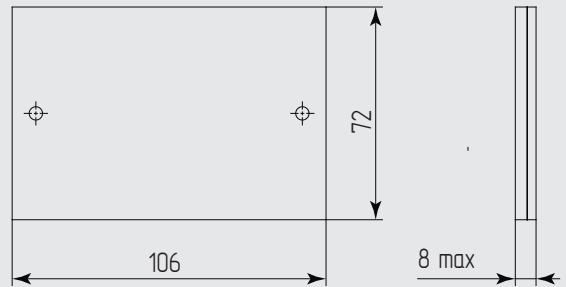

IR-Plate-2-850

Angle	120°
Distance	2.5 m
Power consumption	4.5 W

IR-Plate-3-850

Angle	150°
Distance	3.0 m
Power consumption	5.1 W

IR-Plate-2-940

Angle	120°
Distance	1.5 m
Power consumption	4.5 W

IR-Plate-3-940

Angle	150°
Distance	2.5 m
Power consumption	5.1 W

Distance of illumination is indicated for the camera with a matrix of 1.3 " 2Mpix, with Sence-Up mode off.

To determine the approximate distance of the backlight for analog videocameras use a correction factor of 2.5 - 3.0.



high-performance surface-mount LEDs



increased efficiency of removal of heat from the radiating elements



IR light filter with minimal loss of radiation power



low power consumption



supply voltage or 12 V DC

Optional:

RAL color available

